


**FHT-TL-139**  
Single Door

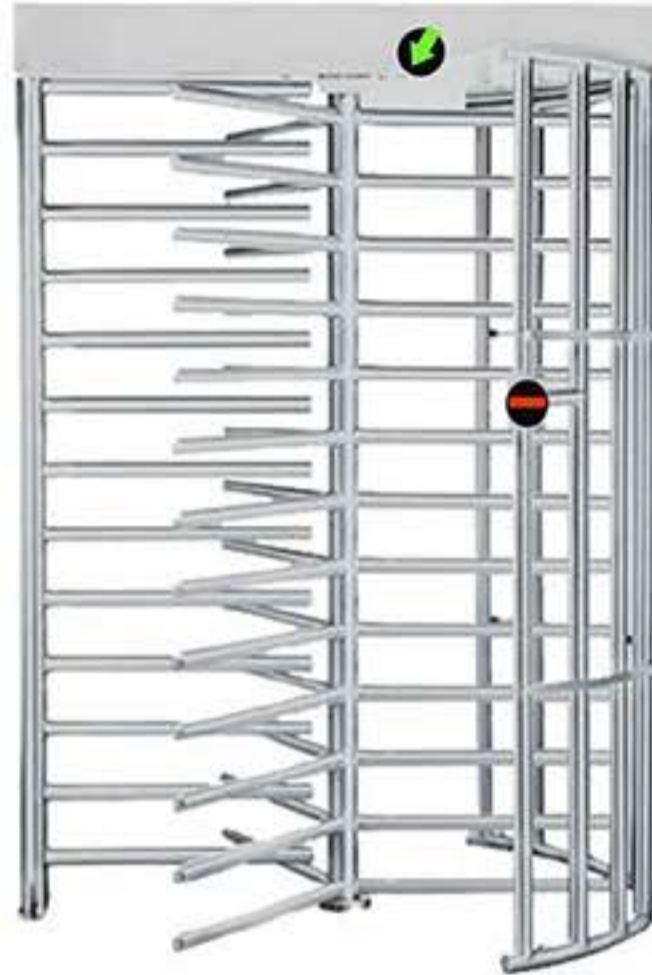

## ➔ Full Height Turnstile - FHT-TL-139-Single Door

Power Supply : 100V ~ 240V AC  
Control Circuit : 24V DC  
Power Consumption : 30W  
Operating Temperature range : -25°C ~ +70°C  
Protection level (IP) : ≥ 44  
Humidity : 95%  
Hydraulic damper : Adjustable  
Solenoid : 24V DC 100%  
Throughput : Person  
Signal Output : 12V Pulse  
Communication Interface : RS485 or TCP/IP  
Passage width : ≤ 650mm  
Frequency : ≤ 50Hz or 60Hz  
Electro-magnetic drive : DC  
Section version : 120 degree  
No of arms : 3 arms  
Dimensions : 1630 x 1500 x 2310 mm  
Net weight : 220 kg

### Feature :

- ▶ Designed for secure operation with aesthetics in mind
- ▶ Corrosion protected S/S frame
- ▶ Minimal exposed hardware
- ▶ Heavy Gauge materials ASTM Standard
- ▶ Consists of rotor assembly, shield
- ▶ Assembly, barrier section, mechanism housing & ceiling plate
- ▶ The barrier can be set to delay closing in 1 ~ 60s after a valid card reading
- ▶ Single passage in the set direction  
Bi-directional single passage
- ▶ Free passage in the direction
- ▶ Always free or locked