


# Multidoor Access Control - 2 Door

## eSSL-Access-8002

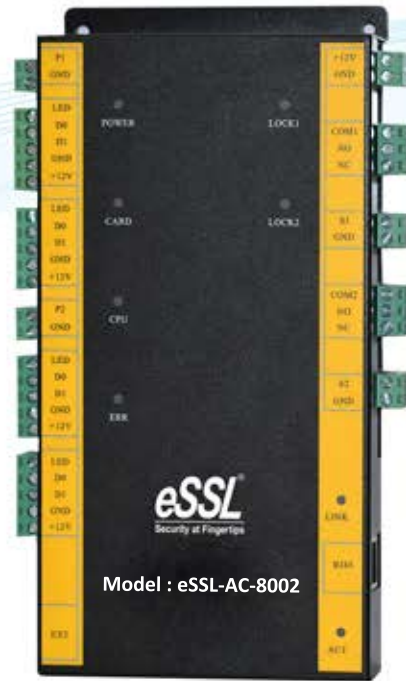

## Specification

Card Capacity : 20,000  
Event buffer : 1,00,000  
Communication : TCP/IP 10M/100M adaptive  
Function Description : Control 2 doors, enter via cards swiping and exit via buttons, or both enter & exit via cards swiping  
PCB board size : 21.9 \* 12.2 \* 3.4cm  
Controller case size : 273\*228\*65mm  
Power supply : 12V DC 4-7A  
Power consumption of circuit board : < 200mA  
Reader input format : Wiegand 26/34  
Card Reader supported : 4 (2 In & 2 Out)  
Door control output : 4  
Operation Temperature : -40 °C - 70°C  
Operation Humidity : 10-90 % RH, No Condensation

Power interruption protection measure : High Speed Memory, Records never lose  
Max Distance between Controllers : TCP/IP communication,  
Fire and alarm linkage : Optional

### Software and Database Supported :

eSSL Professional Door Control Software  
Database Type:- MS Access / MS SQL