

D series Vertical Tripod Turnstile DT1000




Passage width : <550 mm
Throughput rate : 35 p/m
Power supply : 100-240 V/(ac)
Operational voltage : 24 V/(dc)
Max power consumption : 35w
Frequency : 50-60hz
Protection level : >44
Working temperature : Degree -25 to +70
Dimension excluding bars : 480x280x980
Net weight includingsbars : 38 Kg
MCBF : 3 Million

Features

- Use of RFID IC cards, ID cards, Barcode or magnetic cards as automatic identification system and achieve access attendance, fees or function.
- A direction indicator showed that the pedestrian access to the current status and guide pedestrian correctly and in smooth passage.
- Semi-auto mode: After reading card the passenger pushes the arm by hand until he goes through the barriers and the arm arrives in home position.
- Full-auto mode: The passenger pushes the arm at a little strength after reading card, and the arm will automatically rotate forward by motor power until the arm arrives in home position.
- Pure mechanical mode: The passenger pushes the arm by hand until he goes through the barriers.
- Single or bi-directional function in mechanical and electrical versions.
- Automatic reset of barrier arms after each passage.
- Cable or wireless remote control panel key override control for emergency situations. Automatically arm drop down when power off or emergency.
- Adjustable time out delay.

Dimension

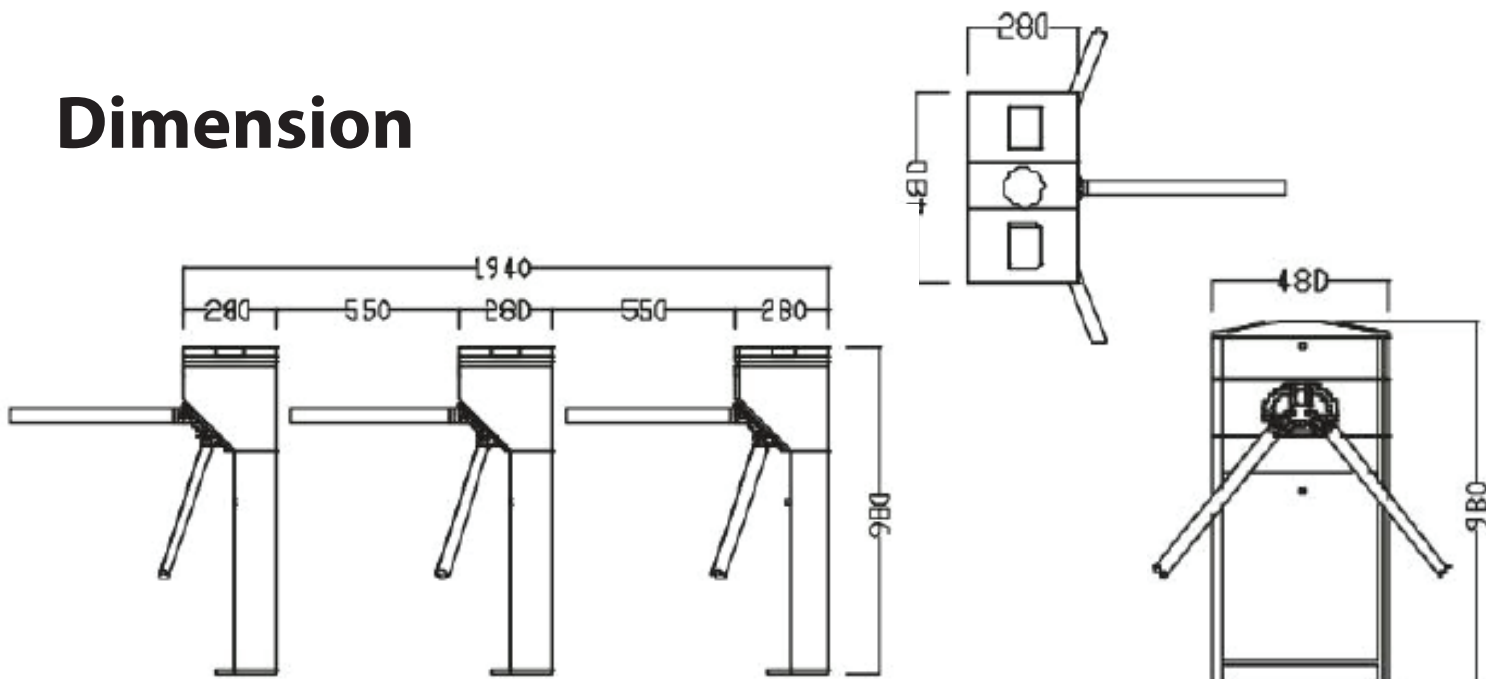

Disclaimer: Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development

Visit Us at: www.esslsecurity.com